

Auto Sensor TOTO Soap Dispenser with Subtank

FEATURES

- Sensor operated foaming soap dispenser
- Self-adjusting sensor spout with base unit, mounting hardware and supply lines
- Chrome plated
- Single-hole mount
- TOTO Soap required
- Refillable tank system
- ADA compliant

OPTIONAL ACCESSORIES

- **THP3140#CP**  
Escutcheon 1-1/8" ~1 -1/2" (28 mm~38 mm)
- **THP3374**  
Mounting bracket for tank

COLORS/FINISHES

- #CP Polished Chrome

PRODUCT SPECIFICATION

TOTO Model No. \_\_\_\_\_  
Product shall be automatic infrared sensor activated. Product shall have automatic sensor adjustment upon installation. Soap dispenser and controller w/ reservoir will be sold separately. Product shall have a controller pump with 0.8 gallon (3L) reservoir



CODES/STANDARDS

- Meets and exceeds UL1951, CSA C22.2 #68
- Certifications: IAPMO(cUPC)
- Code Compliance: NEC, CEC
- ADA Compliant
- Compliance with CA Prop 65 warning requirements



MODELS

| Kit Options | Component Breakdown |                        |           |
|-------------|---------------------|------------------------|-----------|
|             | Spout (xQTY)        | Controller & Reservoir | Subtank   |
| TES204AA#CP | TLK03001G#CP (x2)   | TLK01106UA             | TLK01401U |
| TES205AA#CP | TLK03001G#CP (x3)   | TLK01107UA             | TLK01401U |

# TES20(4/5)AA Series

## Auto Sensor TOTO Soap Dispenser with Subtank

### SPECIFICATIONS

|                        |                                                                        |
|------------------------|------------------------------------------------------------------------|
| Power Supply           | AC 120V                                                                |
| Wattage                | (TLK01106UA) 6.5W<br>(TLK01107UA) 9W                                   |
| Sensor Detection Range | 5-1/8" ~ 7-7/8" (130 ~ 200 mm)<br>Sensor is self-adjusting             |
| Ambient Temperature    | 34-104°F (1-40°C)                                                      |
| Humidity               | Max. 90% RH                                                            |
| Power Cord Length      | 55" (1.4 m)                                                            |
| Soap Output Volume     | 0.04 oz (factory setting)                                              |
| Tank Capacity          | Approximately 0.8 gal (3L) Tank<br>Approximately 5.3 gal (20L) Subtank |
| Warranty               | *Three Year Warranty                                                   |

\* Failure to use TOTO soap will void warranty


### INSTALLATION NOTES

- Spout Mounting Hole  $\varnothing 1"$  ~  $\varnothing 1\text{-}1/8"$  ( $\varnothing 25$  ~  $\varnothing 28$  mm)
- Deck Thickness  $1/4"$  ~  $1\text{-}1/8"$  (5 ~ 30 mm)

### TOTO SOAP (Sold Separately)

| SKU NO. | QTY    | Packaging     | Notes                                 |
|---------|--------|---------------|---------------------------------------|
| TSFG1   | 4 gal. | 4, 1 gal. ea. | Antibacterial Foam Soap               |
| TSF201  | 4 gal. | 4, 1 gal. ea. | TOTO Foam Hand Soap Green Seal® GS-41 |
| TSF205  | 5 gal. | 1, 5 gal.     | TOTO Foam Hand Soap Green Seal® GS-41 |

### DIMENSIONS

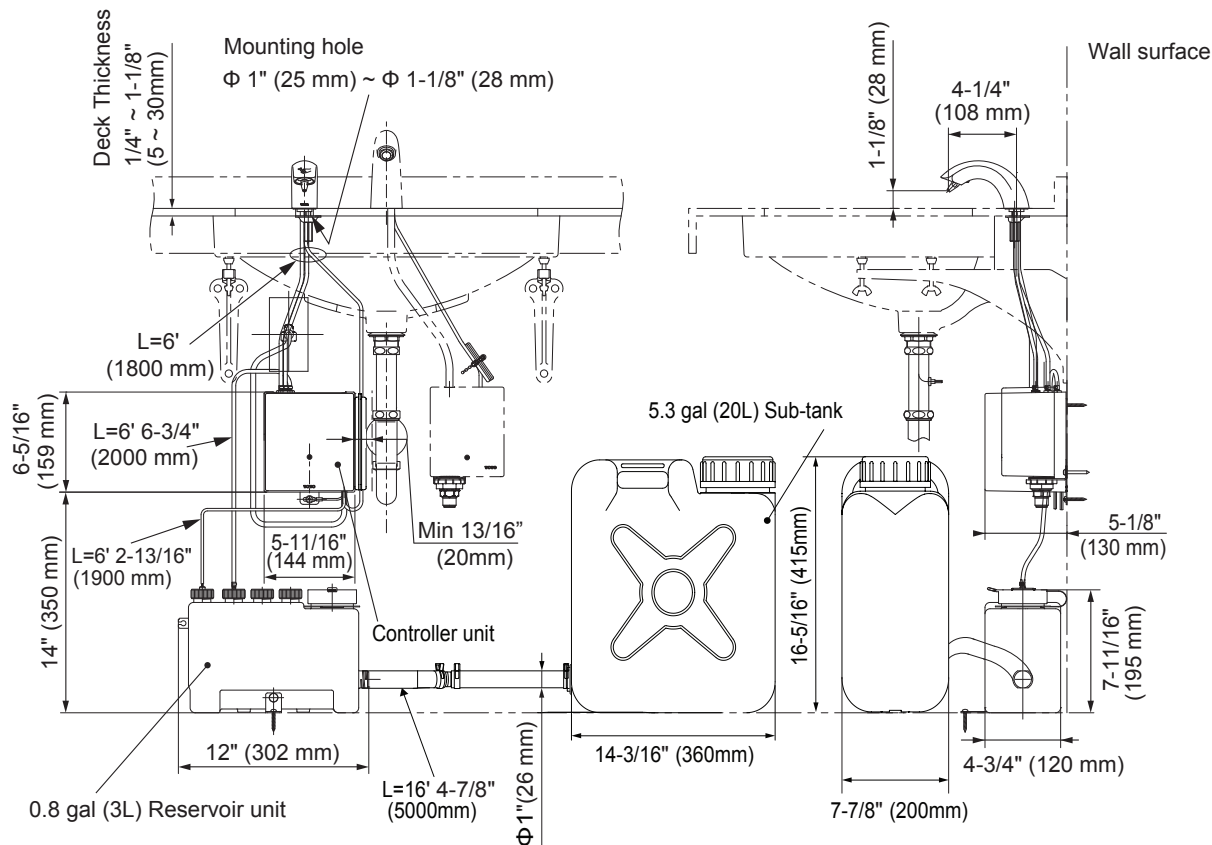

**TOTO®**

These dimensions and specifications are subject to change without notice