

Keane® Widespread Lavatory Faucet

FEATURES

- WaterSense® certified low-flow 1.5 gpm (5.7 lpm) faucet
- Lever handles
- Brass construction
- Ceramic disk valve cartridges
- Accommodates 6"-12" spread
- Metal pop-up drain assembly included
- Pivoting aerator

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel



PRODUCT SPECIFICATION

Product shall have a maximum flow rate of 1.5 gpm (5.7 lpm). Product shall have lever handles. Product shall have a brass construction. Product shall have a ceramic disk valve cartridges. Product shall accommodate 6" -12" spread. Product shall include metal pop-up drain assembly. Product shall have a pivoting aerator. Product shall be TOTO Model TL211DDR#_____.

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61-9, NSF/ANSI/CAN 372
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, DoE, NPC Canada, and others
- Complies with federal and state requirements for low-lead legislation
- ADA compliant
- Complies with CA Prop 65 warning requirements
- Meets or exceeds California AB100 Law that requires lead content less than 1ppb




TL211DDR


Keane® Widespread Lavatory Faucet

SPECIFICATIONS

Material	Brass
Maximum Flow Rate	1.5gpm (5.7lpm)
Warranty	Lifetime Limited Warranty (Residential Use) One Year (Commercial Use)
Shipping Weight	9.4 lbs
Shipping Dimensions	13-1/2" L x 7-1/2" W x 4-3/4" H

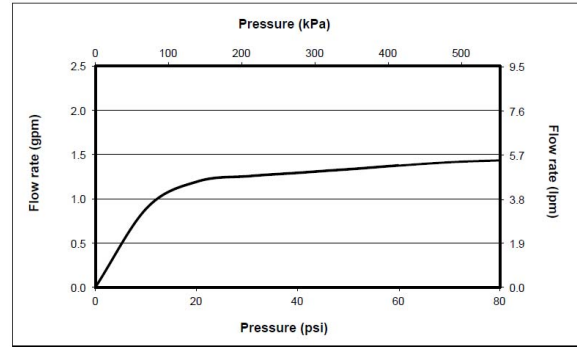

DIMENSIONS

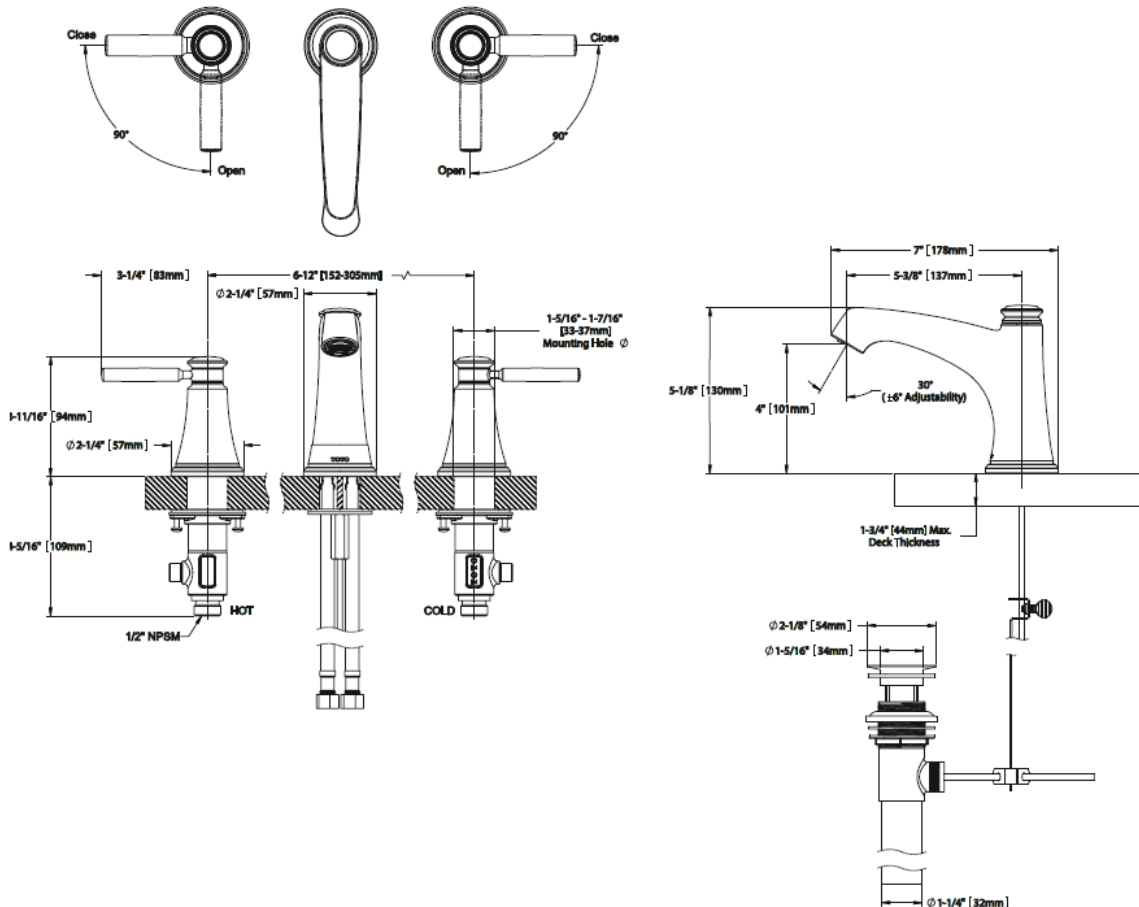

TOTO®

These dimensions and specifications are subject to change without notice